


Scholar

The **Scholar** LED luminaires provide simple installation, high light output, low energy and long life from a very attractive and price competitive package. Ideal for all educational, commercial and retail applications and offering a perfect solution for applications requiring mains and emergency lighting with the minimum of fuss, **Scholar** batten luminaires are available in two lengths — 1200mm (up to 3770 luminaire lumens) and 1500mm (up to 4730 luminaire lumens). **Scholar** body finish is to RAL 9016. Installation and maintenance couldn't be easier, via the 'Easy Release Module' (see below).

DALI/Self-Test Options

Scholar luminaires can be specified with integral DALI/Self-Test gear providing automatic Self-Test in accordance with BS EN 62034 or fully interoperable DALI operation when connected to a DALI control system.



FEATURES

- Up to 4730 lumens

- Long life (>50K hours)

- IP20 rated

- 1200mm and 1500mm lengths

- Steel enclosure

- RAL 9016 body finish

- Push button lift-off access



EASY RELEASE MODULE



Push buttons on the body to release the light module from the base.



Simply lift-off the light module for easy access to the geartray.



Emergency Lighting Products Limited
 Parbrook House, Gillmans Industrial Estate,
 Natts Lane Billingshurst, West Sussex RH14 9EZ

Telephone: +44 (0) 1403 786601
 Fax: +44 (0) 1403 786602
 e-mail: sales@elp.uk.com


Safe in the knowledge
elp.uk.com



Surface Mounted Emergency Batten Luminaires

Scholar


PHOTOMETRIC DATA

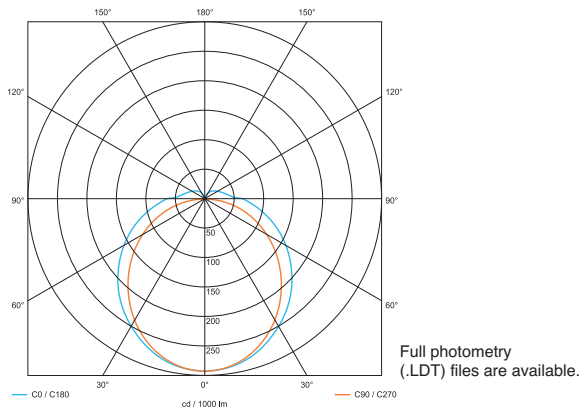


GENERAL SPECIFICATION

Product	Mains and Emergency Batten Luminaire	
Light Source	LED (4000K, CRI80+)	
Luminaire Lumens	Up to 4730lm	
Insulation Class	Class 1 — BS EN 60598-1	
Environmental Rating	IP20; Ta25	
Dimensions	SC40-1200	1200(L) x 71(W) x 63(H)
	SC40-1500	1500(L) x 71(W) x 63(H)
Maximum Weight	SC40-1200	1.85 kg
	SC40-1500	2.00 kg


SURFACE MOUNT INSTALLATION




STEP 1: Press the quick release buttons on the side of the luminaire base to release the light module.



STEP 2: Disconnect the electrical plug. Fix base to the mounting surface with fixing screws and suitable anchors.



STEP 3: Connect the mains supply to the LED driver via the terminal block.



STEP 4: Reconnect the electrical plug and reseat the light module.

ORDER CODES

Scolar 1200

MAINS		EMERGENCY		ORDER CODE
Fixed	DALI	Standard	DALI	
✓				SC40-1200-230-DM3-WH
	✓			SC40-1200-230-D-WH
✓		✓		SC40-1200-230-M3-WH
	✓	✓		SC40-1200-D-M3-WH
✓			✓	SC40-1200-230-DM3-WH
	✓		✓	SC40-1200-D-DM3-WH

Scolar 1500

MAINS		EMERGENCY		ORDER CODE
Fixed	DALI	Standard	DALI	
✓				SC40-1500-230-DM3-WH
	✓			SC40-1500-230-D-WH
✓		✓		SC40-1500-230-M3-WH
	✓	✓		SC40-1500-D-M3-WH
✓			✓	SC40-1500-230-DM3-WH
	✓		✓	SC40-1500-D-DM3-WH