

Excel

The **Excel** range offers decorative surface mounted circular luminaires in two diameters and incorporating high output white LEDs providing ultra-long-life and low energy.

The **Excel** luminaires utilise an aluminium base (White as standard) and twist-on PMMA diffuser.

OPERATION

The **Excel** luminaires are available in two diameters 330mm with 1490Lumen output or 400mm with 1920Lumen output.

The **Excel** luminaires are available with mains only or Maintained emergency operation. All emergency versions provide 3 hour duration from integral high temperature Nickel Cadmium batteries. Maintained versions can be used for standard switched mains lighting but will automatically provide emergency lighting in the event of a complete loss of normal mains supply.

The benefits of the modern white low power LEDs include long life (typically 50,000hours+), excellent energy efficiency (>100lm/W), low operating temperatures therefore improving the life of the internal Nickel Cadmium (NiCd) batteries and good operation at low ambient temperatures.

The luminaires fully comply with the requirements of EN60598.2.22 and the low energy consumption assists with compliance with Part L Requirements.

DALI/Self-Test Options:

The **Excel** emergency luminaires can be specified with integral DALI/Self-Test gear providing automatic Self-Test in accordance with BSEN62034 or fully interoperable DALI operation when connected to a DALI test system.

Excel luminaires can also be specified as DALI mains or DALI mains plus DALI emergency.




XL330/M3/WH/SL



XL400/230 Standard base

GENERAL DETAILS

Product	Decorative circular luminaire
Light source	White LEDs 2400lm or 2800lm
Luminaire Lumens	/330 – 1490lm /400 – 1920lm
Construction	White Aluminium base (standard) with Twist-on PMMA diffuser
Geartray	Integral to base
Dimensions	/330 – 326mm (dia.) x 98mm (H) /400 – 395mm (dia.) x 113mm (H)
Cable entry	20mm hole (centre of back plate)

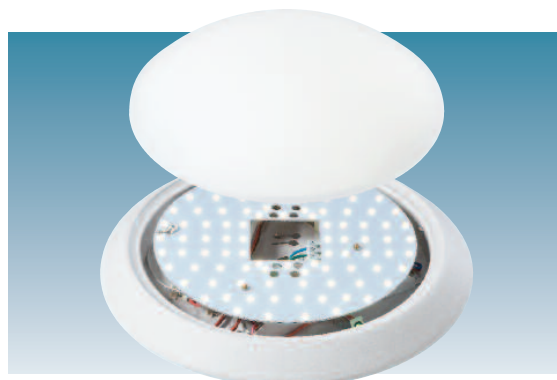

Emergency Lighting Products Limited
Parbrook House, Gillmans Industrial Estate,
Natts Lane Billingshurst, West Sussex RH14 9EZ

Telephone: +44 (0) 1403 786601
Fax: +44 (0) 1403 786602
e-mail: sales@elp.uk.com

Safe in the knowledge
elp.uk.com

Circular Luminaires

Excel

SPECIFICATION

	Maintained	Mains only
Light source	Surface mount White LEDs 2400lm or 2800lm	
Colour temperature	4500K	
Luminaire lumens (mains)	/330 — 1490lm /400 — 1920lm	/330 — 1490lm /400 — 1920lm
Lumens (emergency)	/330 — 400lm /400 — 410lm	—
IP rating	IP20	
Ambient temperature (Ta)	25°C	
Insulation class	Class I	
Supply voltage	230V ~ 50Hz	
Supply power	/330 — 21.4 W /400 — 26.1 W	/330 — 18.4 W /400 — 22.7 W
Charge power (typical)	3.5 W	—
Battery	1 x 6.0V 2.0Ah NiCd	—
Weight	/330 — 3.1kg /400 — 3.4kg	/330 — 1.0kg /400 — 1.3kg

EXCEL — Emergency Lighting Spacings

	Mounting height Hm (m)	Fitting to Wall	Fitting to Fitting	
/330 Small luminaire in emergency mode	2.5	4.2	10.6	1 Lux min at centre
	4.0	4.6	12.3	
	2.5	5.1	11.5	0.5 Lux min (open)
	4.0	5.3	12.9	
/440 Large luminaire in emergency mode	2.5	4.2	10.7	1 Lux min at centre
	4.0	4.8	12.5	
	2.5	5.2	11.6	0.5 Lux min (open)
	4.0	5.4	13.0	

ORDER CODES

Description

XL330/M3/WH	330mm diameter Maintained emergency luminaire; white body with opal diffuser
XL330/M3D/WH	330mm diameter Maintained DALI emergency luminaire; white body with opal diffuser
XL330/230/WH	330mm diameter Mains only luminaire; white body with opal diffuser
XL330/230D/WH	330mm diameter DALI Mains only luminaire; white body with opal diffuser
XL330/230D/M3D/WH	330mm diameter DALI Mains plus Maintained DALI emergency luminaire; white body with opal diffuser
XL400/M3/WH	400mm diameter Maintained emergency luminaire; white body with opal diffuser
XL400/M3D/WH	400mm diameter Maintained DALI emergency luminaire; white body with opal diffuser
XL400/230/WH	400mm diameter Mains only luminaire; white body with opal diffuser
XL400/230D/WH	400mm diameter DALI Mains only luminaire; white body with opal diffuser
XL400/230D/M3D/WH	400mm diameter DALI Mains plus Maintained DALI emergency luminaire; white body with opal diffuser

OPTIONS:

/SL	Brushed silver body
/MW	MicroWave presence detector for mains operation*

* NB: Only available on XL400

NB: Contact our Sales Office regarding optional LiFePO4 versions

Emergency Lighting Products Limited
Parbrook House, Gillmans Industrial Estate,
Natts Lane Billingshurst, West Sussex RH14 9EZ

Telephone: +44 (0) 1403 786601
Fax: +44 (0) 1403 786602
e-mail: sales@elp.uk.com

Safe in the knowledge
elp.uk.com