

# Finesse

## Surface/Recessed LED slim bulkhead

The **Finesse** range offers an attractive, slim, IP rated enclosure suitable for semi-flush or surface mounting with white LED light sources. The **Finesse** luminaires utilise a polycarbonate body and lens with linear prisms providing wide intensity distribution.

**Finesse** luminaires are available with an alternative lens which has a slot retaining an injection moulded legend blade.

## OPERATION

The **Finesse** LED luminaires are available with Non-Maintained, Maintained or mains only operation. (Non-maintained operation is available by excluding a switched live supply).

All emergency versions provide 3 hour duration as standard from integral high temp. Nickel Cadmium batteries. Maintained versions can be used for standard switched mains lighting but will automatically provide emergency lighting in the event of a complete loss of normal mains supply.

**Finesse** luminaires can be semi-recessed mounted using the FI/RB kit. The hanging blade exit panels require a different lens to the plain version which reduces the IP rating to IP21.

The benefits of the modern white low power LEDs include long life (typically 50,000hours+), excellent energy efficiency (>100lm/W), low operating temperatures therefore improving the life of the internal Nickel Cadmium (NiCd) batteries and good operation at low ambient temperatures.

**NOTE:** **Finesse** luminaires can be equipped with **SurePath BLE** Bluetooth addressable Gateway modules. *See Data Sheet.*

The luminaires have been tested and BSI Kitemark Certified to EN60598.2.22 and they are also Certified by UAE Ministry of Interior Civil Defense GHQ.

## DALI/Self-Test Options:



The **Finesse** LED luminaires can be specified with integral DALI/Self-Test gear providing automatic Self-Test in accordance with BSEN62034 or fully interoperable DALI operation when connected to a DALI control system.

The **Finesse** luminaires can also be specified with DALI control mains drivers or both DALI mains and DALI Maintained emergency.



## GENERAL DETAILS

Product	Bulkhead and Exit Sign
Light source	16 x white LEDs (CRI >70)
Luminaire Lumens	>160lm
Sign viewing distance	34m (BLD)
Construction	Polycarbonate base with optical grade, UV stabilised linear prism lens
Geartray	Hinged white painted steel
Dimensions	375mm (L) x 160mm (W) x 75mm (H)
Cable entry	20mm drilling points (polycarbonate)

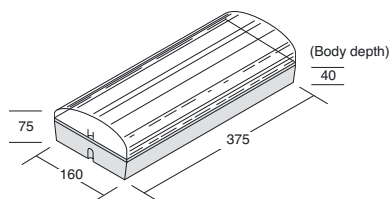

FID/M3/RB



FIDE/M3



FIDE/M3/FI/BLD/ISOAR

**Emergency Lighting Products Limited**  
Parbrook House, Gillmans Industrial Estate,  
Natts Lane Billingshurst, West Sussex RH14 9EZ

Telephone: +44 (0) 1403 786601  
Fax: +44 (0) 1403 786602  
e-mail: sales@elp.uk.com

**Safe in the knowledge**  
**elp.uk.com**

## IP64 Slim Bulkhead and Exit Sign Luminaires

# Finesse

### SPECIFICATION

	Maintained	Mains only
Light source	16 x white LEDs (CRI >70)	
Colour temperature	4500K	
Luminaire lumens (mains)	>160lm	>160lm
Lumens (emergency)	>160lm	—
IP rating	IP64 (IP21 for Blade Exit)	
Ambient temperature (Ta)	25°C	
Insulation class	Class II	
Supply voltage	230V ~ 50Hz	
Supply power	3.0W	1.7W
Charge power (typical)	1.2W	—
Battery	3.6V 1.5Ah NiCd	—
Weight	1.5kg	1.4kg

### FINESSE — Emergency spacing (White Base/Clear Lens)

Mounting height Hm (m)	Trans. to wall	Trans. to trans.	Axial to trans.	Axial to axial	Axial to wall	
2.5	2.0	6.9	6.1	3.6	1.1	1 Lux min.
4.0	1.5	5.7	5.3	3.4	0.5	at centre
2.5	3.4	9.7	8.0	5.2	1.7	0.5 Lux min.
4.0	2.5	9.5	7.8	5.0	1.0	(open)

### ORDER CODES

#### Description

<b>FID/M3</b>	Maintained emergency slim polycarbonate bulkhead + lens
<b>FID/M3D</b>	Maintained DALI emergency slim polycarbonate bulkhead + lens
<b>FID/230</b>	Mains only slim polycarbonate bulkhead + lens
<b>FID/230D</b>	DALI Mains only slim polycarbonate bulkhead + lens
<b>FIDE/M3</b>	Maintained emergency polycarbonate bulkhead + blade exit legend
<b>FIDE/M3D</b>	Maintained DALI emergency polycarbonate bulkhead + blade exit legend
<b>FIDE/230</b>	Mains only polycarbonate bulkhead + blade exit legend
<b>FIDE/230D</b>	DALI Mains only polycarbonate bulkhead + blade exit legend

OPTIONS:	<b>/RB/KIT</b>	Semi-recessing kit
BLADE EXIT LEGENDS:	<b>/BLD/ECAR</b>	EC format — Arrow Right/Left
	<b>/BLD/ECAD</b>	EC format — Arrow Down
	<b>/BLD/ISOAR</b>	ISO format — Arrow Right/Left
	<b>/BLD/ISOAU</b>	ISO format — Arrow Up
	<b>/BLD/ISOAD</b>	ISO format — Arrow Down

#### SELF-ADHESIVE EXIT LEGENDS:

<b>F/LEG/KIT/EC</b>	EC format self-adhesive kit
<b>F/LEG/KIT/ISO</b>	ISO format Self-adhesive kit

**NB:** Contact our Sales Office regarding optional LiFePO<sub>4</sub> versions

**Emergency Lighting Products Limited**  
Parbrook House, Gillmans Industrial Estate,  
Natts Lane Billingshurst, West Sussex RH14 9EZ

Telephone: +44 (0) 1403 786601  
Fax: +44 (0) 1403 786602  
e-mail: sales@elp.uk.com

**Safe in the knowledge**  
**elp.uk.com**