

SignalLED

The **SignalLED** range of LED exit sign luminaires offer long life, low energy and flexible mounting solutions in a choice of attractive, maintained packages.

The suspended luminaires feature extruded aluminium housings and a wide range of mounting attachments allowing wall, ceiling or suspended solutions. The recessed luminaires have conventional styling but with all the size and performance benefits provided from the latest LED technology.

The luminaires feature a unique method of fitting legend 'screens' onto the double-sided, acrylic blades. Legends are available in all common legend types and are supplied as 'same type' sets of two.

SignalLED luminaires offer Maintained operation as standard providing 3 hour duration. (Non-maintained operation is available by excluding a switched live supply). The benefits of the modern white low power LEDs include long life (typically 50,000hours+), excellent energy efficiency (>100lm/W), low operating temperatures thereby improving the life of the internal Nickel Cadmium (NiCd) batteries and good operation at low ambient temperatures.

All **SignalLED** luminaires comply with the relevant requirements of EN60598.2.22

NB: All main internal wiring is Low Smoke, Zero Halogen.

DALI/Self-Test Options:

SignalLED LED luminaires can be specified with integral DALI/Self-Test gear providing automatic Self-Test in accordance with BSEN62034 or fully interoperable DALI operation when connected to a DALI control system.

SUSPENDED/SURFACE VERSIONS (SLD)

The suspended **SignalLED** luminaires are much smaller than conventional fluorescent hanging sign luminaires making installations more attractive but still providing a 28metre viewing distance. All units are supplied with integral Maintained emergency lighting control gear powering 15 high brightness white LEDs which clearly and evenly illuminate the safety sign legends.

The range of mounting brackets allow fixing direct to the ceiling, wall fixing (parallel or perpendicular to the wall) or suspended solutions (surface or wire). In all cases the fixing brackets retain the standard luminaire body via quick release spring clips or two quarter turn latches.

RECESSED VERSIONS (RLD)

Although recessed **SignalLED** luminaires have a similar appearance to conventional recessed exit signs these LED fittings are much smaller and make installations far more attractive.

The housing has adjustable arms to simplify installation into different thickness supporting surfaces and the visible ceiling plate is available with a choice of finishes.

As with the suspended **SignalLED** luminaires the recessed versions are supplied with integral Maintained emergency lighting control gear powering 15 high brightness white LEDs which clearly and evenly illuminate the safety sign legends.

SLD/M3/SL/ISOAR (with CBRK ceiling bracket)



SLD/WIRE



RLD/M3/WH/ECAD



Emergency Lighting Products Limited
Parbrook House, Gillmans Industrial Estate,
Natts Lane Billingshurst, West Sussex RH14 9EZ

Telephone: +44 (0) 1403 786601
Fax: +44 (0) 1403 786602
e-mail: sales@elp.uk.com


Safe in the knowledge
elp.uk.com

Exit Sign Luminaires (Recessed and surface)

SignalLED

SPECIFICATION

Light source	15 x wide angle white LEDs	
Colour temperature	4500K	
IP rating	IP20	
Ambient temperature (Ta)	0 to 25°C	
Insulation class	Class I	
Supply voltage	230V ~ 50Hz	
Supply power	4.4W	3.1W
Charge power (typical)	1.7W	—
Battery	4.8V 0.9Ah NiCd	—
Weight	>3kg	>2.5kg

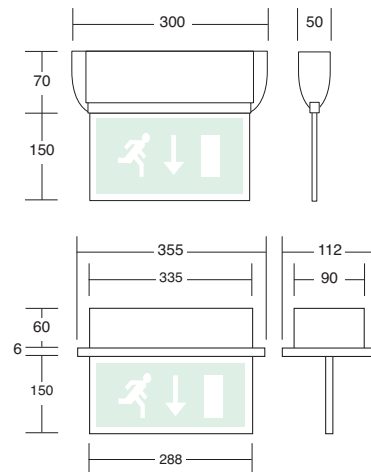

ORDER CODES Description

SUSPENDED VERSIONS

SLD/M3/SL Suspended LED exit sign Maintained (SL = Silver aluminium body)

NB: For **SLD** versions the standard body must be ordered with an appropriate mounting kit

SLD MOUNTING SYSTEMS

SLD/CBRK/SL	Ceiling mounting bracket
SLD/WBRK/SL	Wall mounting bracket
SLD/EBRK/SL	End fixing (flag) wall mounting bracket
SLD/WIRE/SL	Wire suspension kit (adjustable to 1metre max)
OPTIONS:	/DALI DALI or Self-Test emergency operation
	/WH White painted finish

RECESSED VERSIONS

RLD/M3/WH Recessed LED exit sign Maintained (WH = White painted ceiling plate)

OPTIONS:	/DALI DALI or Self-Test emergency operation
-----------------	--

LEGEND OPTIONS:

NB: Legend screen sets are supplied as 'same type' twins plus a blank for single sided formats.

- /ECAR** EC Format — Arrow Right
- /ECAL** EC Format — Arrow Left
- /ECAD** EC Format — Arrow Down
- /ISOAR** ISO Format — Arrow Right
- /ISOAL** ISO Format — Arrow Left
- /ISOAU** ISO Format — Arrow Up
- /ISOAD** ISO Format — Arrow Down

Emergency Lighting Products Limited
 Parbrook House, Cillmans Industrial Estate,
 Natts Lane Billingshurst, West Sussex RH14 9EZ

Telephone: +44 (0) 1403 786601
 Fax: +44 (0) 1403 786602
 e-mail: sales@elp.uk.com

Safe in the knowledge
elp.uk.com

